

ORDINANCE NO. 1604

AN ORDINANCE AUTHORIZING THE INTERIM CITY ADMINISTRATOR TO ENTER INTO A PURCHASE AGREEMENT WITH PAPE TRUCKS IN THE AMOUNT OF \$282,723.81 TO PURCHASE A NEW DUMP TRUCK; AND DECLARING AN EMERGENCY.

WHEREAS, the City of Canby Department of Public Works (Public Works) requires transportation of material as part of its mission to perform maintenance on City of Canby (City) streets, the City's sanitary sewer system, and the City's storm system;

WHEREAS, the City of Canby Public Works Department uses one dump truck;

WHEREAS, the dump truck in the possession of the City of Canby is a piece of equipment used daily by the Public Works Department; and

WHEREAS, a new dump truck would provide for a more efficient and safe operations for transportation of material which is part of the City of Canby Public Works functions.

THE CITY OF CANBY, OREGON, ORDAINS AS FOLLOWS:

Section 1. The Interim City Administrator is hereby authorized on behalf of the City to enter into a purchase agreement with Pape Trucks to purchase a new dump truck. A copy of the Purchase Agreement is attached hereto as Exhibit "A."

Section 2. Inasmuch as it is in the best interest of Canby, Oregon, to complete this project as soon as possible, an emergency is hereby declared to exist and this ordinance shall therefore take effect immediately upon its enactment after final reading.

Section 3. The effective date of this Ordinance shall be June 21, 2023.

SUBMITTED to the Canby City Council and read the first time at a regular meeting therefore on Wednesday, June 7, 2023 ordered posted as required by the Canby City Charter; and scheduled for second reading on Wednesday, June 21, 2023 commencing at the hour of 7:00 PM in the Council Chambers located at 222 NE 2nd Avenue, 1st Floor Canby, Oregon.




Maya Benham,
City Recorder

PASSED on second and final reading by the Canby City Council at a regular meeting thereof on the Wednesday June 21, 2023, by the following vote:


YEAS 4

NAYS 0



Brian Hodson
Mayor

ATTEST:

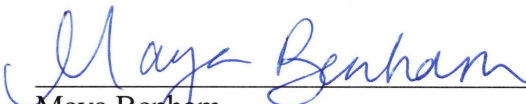

Maya Benham,
City Recorder

Exhibit A



Portland (#1)
550 NE Columbia Blvd
Portland, OR 97211-1402
503-240-6282

Purchase Agreement

Billing Address:
City of Canby - Canby
P O Box 930
Canby, OR 97013

Quote Number: QUO-877048-R1P1W7
Today's Date: May 26, 2023
Quote Expiration: July 17, 2023
Payment Terms: Payment on Delivery

Prepared For: Chris Wright

Dear Chris Wright,

Papé Kenworth is pleased to submit the following purchase agreement to City of Canby - Canby for the items described below. Please also see our terms and conditions at the end of this document.

Item No.	Truck Description	Qty	Unit Price	Extended Price
0000810	T880 - 3 Axle Dump Chassis	1	\$175,659.87	\$175,659.87
	Taxes - TRUCK & DUMP BODY			\$30,186.87
	Additional Fees - TRUCK & DUMP BODY			\$981.07
	Additional Fees - Columbia Dump Body W/ Camera System			\$75,896.00
TOTAL NET AMOUNT				\$282,723.81

We will be pleased to firm up delivery times upon receipt of your purchase order. Please reference quote number QUO-877048-R1P1W7 when replying to us.

We trust that this purchase agreement meets your needs and appreciate the opportunity to partner with City of Canby - Canby. Please do not hesitate to call me if you have any questions.

Sincerely,

I accept this Purchase Agreement and acknowledge that this is a firm order.

Blake Schumacher
Territory Manager

Chris Wright

e: bschumacher@papekenworth.com
p: (541) 868-7098

Q4 2023 Build

Terms and Conditions

TERMS AND CONDITIONS OF SALE: Sales Orders are based on the terms and conditions stated herein. Unless otherwise provided on the face hereof, offers are good for acceptance for a period of 30 days from the date hereof. An order by the Buyer shall constitute an acceptance of the terms and conditions herein proposed. If, and only if, no offer of sale is issued by Seller, then the invoice shall be deemed: an acceptance of the Buyer's order; a written confirmation; and a final, complete, and exclusive written expression of the agreement between Seller and Buyer. Buyer is hereby notified that additional or different terms from those contained herein are objectionable.

1. **Prices.** Prices quoted by Papé Kenworth are subject to change without notice. Papé Kenworth's prices in effect at the date of delivery will govern.

2. **Taxes.** Buyer shall pay all local, state, and federal taxes arising from or related to any sale or lease to which this document relates, except for taxes upon or measured by net income of Seller.

3. **Delivery.** Stated or promised delivery dates are estimates only based upon Seller's best judgment and Seller shall not be responsible for deliveries later than promised regardless of the cause. Delivery periods are projected from the date of receipt of any order by Seller, but if equipment to be furnished by Seller is to be manufactured specifically to fill a particular order, delivery periods will be projected from the date of Seller's receipt of complete manufacturing information. If the furnishing of equipment on orders accepted by Seller is hindered or prevented by public authority or by the existence of war or other contingencies, including, but not limited to, shortage of materials, fires, labor difficulties, accidents, delays in manufacture or transportation, acts of God, embargoes, inability to ship, inability to insure against war risks or substantially increased prices or freight rates, or other causes beyond Seller's control, the obligation to fill or complete such orders shall be excused by Seller's option.

4. **Transportation and Claims.** Prices quoted are net F.O.B. point designated in writing by Seller. When no F.O.B. point is designated in writing by Seller, prices for new equipment shall be deemed to be net F.O.B. point of manufacture and prices for all other equipment shall be deemed to be F.O.B. Seller's place of business at which the order for the equipment is accepted. Seller's responsibility for the equipment shall cease and all risk of loss shall become the Buyer's upon delivery of the equipment to the first carrier for shipment to the Buyer or his consignee, even though such delivery shall be made prior to the arrival of the equipment at the F.O.B. point designated, and any and all claims for shortages, deliveries, damages or non-delivery must be made by the Buyer or his consignee to the carrier. Seller shall in no event be responsible for shortages in shipments unless notice of such shortage is given in writing to Seller within 15 days after receipt of shipment.

5. **Payment and Security.** Buyer agrees to pay in full for the equipment at time of delivery. Buyer agrees to pay the late charge on any past due balance at the rate of 18% per annum. The signatory warrants that he/she has authority to execute this order on behalf of any party for whom he/she signs, and that such party has the power to enter into this agreement and perform its terms. As security for all of Buyer's obligations to Seller, Buyer grants to Seller a security interest in the equipment and authorizes Seller to file all documents necessary to perfect Seller's security interest. The security interest granted hereunder is in addition to any other rights available to Seller, and Seller shall have all of the rights and remedies available to a secured party under the Uniform Commercial Code, all of which are cumulative. Throughout the duration of Seller's security interest, Buyer shall keep the equipment fully insured against theft and loss or damage by fire and other casualty as Seller may from time to time require in accordance with such terms as Seller may require.

6. **Buyer to Furnish.** Performance by Seller is subject to the Buyer furnishing a satisfactory credit rating certificate, letter of credit, evidence of financing, or any other similar papers necessary for the satisfactory completion of such order.

7. **Assignment.** The right to any monies due or to become due hereunder may be assigned by Seller, and Buyer, upon receiving notice of such assignment, shall make payment as directed.

8. **Limitations of Warranties.** If "NEW" warranty is indicated on the reverse side or if new equipment is purchased hereunder, all warranties are strictly given only by the manufacturer. Copies of manufacturer's warranty can be obtained from Seller. If "USED" warranty is indicated on the reverse side, Seller hereby warrants to Buyer that the equipment or components thereof designated on the reverse side, shall be free under normal use and service from defects in material and workmanship for the period shown, commencing on the date of delivery. Buyer's exclusive remedy for breach of the limited warranty shall be the repair or replacement of the warranted equipment without charge to Buyer when returned at Buyer's expense to the Seller's facility where the equipment was purchased, with proof of purchase. Buyer must give notice of any warranty claim not later than 7 days after the expiration of the warranty period and must return the equipment to Seller for repair or replacement no later than 30 days after expiration of the warranty period. Any action against Seller for breach of the limited warranty must be commenced within one year after the date of delivery of the equipment. Seller's warranty does not extend to any defect, claim, or damage attributable to the failure to operate and/or maintain the equipment in accordance with the manufacturer's specifications, or due to the failure to operate or maintain the equipment in accordance with any recommendations of Seller. If "AS IS" is indicated on the reverse side, no warranty of any kind is being given and the equipment is being sold with all faults. THE WARRANTIES IN THIS PARAGRAPH AND ON THE REVERSE SIDE ARE THE EXCLUSIVE WARRANTIES GIVEN BY SELLER AND SUPERSEDE ANY PRIOR, CONTRARY, OR ADDITIONAL REPRESENTATIONS, WHETHER ORAL OR WRITTEN. SELLER HEREBY DISCLAIMS AND EXCLUDES ALL OTHER WARRANTIES, WHETHER EXPRESS, IMPLIED, OR STATUTORY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND ANY IMPLIED WARRANTIES OTHERWISE ARISING FROM COURSE OF DEALING OR USAGE OF TRADE. SELLER SHALL NOT BE LIABLE FOR ANY LOSS, INJURY, OR DAMAGE TO PERSONS OR PROPERTY RESULTING FROM THE FAILURE OR DEFECTIVE OPERATION OF THE EQUIPMENT; NOR WILL SELLER BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY KIND SUSTAINED FROM ANY CAUSE. This exclusion applies regardless of whether such damages are sought for breach of warranty, breach of contract, negligence, or strict liability in tort or under any other legal theory.

9. **Notice.** This paragraph shall serve as notice that The Papé Group, Inc. has assigned its rights to sell its rental equipment (as may be described in this sales order) and its rights to sales proceeds (including "trade-in assets" related thereto) to North Star Deferred Exchange as part of an IRC Sec. 1031 exchange.

10. **Attorneys Fees.** In the event suit or action is instituted against Buyer on account of or in connection with or based upon the terms hereof, the Buyer agrees to pay, in addition to the costs and disbursements provided by law, such sum as the court may adjudge reasonable attorney's fees in both the trial and appellate courts, or in connection with any bankruptcy proceeding.

11. **Entire Agreement.** The foregoing and any addendum shall constitute the complete and exclusive agreement between the parties, and it is expressly understood and agreed that no promises, provisions, terms, warranties, conditions, guarantees, or obligations whatsoever, either expressed or implied, other than as herein set forth or provided for shall be binding on either party. Each party may transmit its signature by facsimile to the other party and such facsimile signatures shall have the same force and effect as an original signature.

I have read, understand, and am bound to these Terms and Conditions.



PAPÉ KENWORTH - PORTLAND (P255)
550 N.E. COLUMBIA BLVD.
PORTLAND, Oregon 97211

CITY OF CANBY PUBLIC WORKS
1470 NE TERRITORIAL RD
CANBY, Oregon 97013
United States of America

Blake Schumacher
Cell Phone: 541-868-7098
Office Phone: 503-240-6282
Email: bschumacher@papekenworth.com

Vehicle Summary

	Unit		Chassis
Model:	T880 Series Conventional	Fr Axle Load (lbs):	14600
Type:	FULL TRUCK	Rr Axle Load (lbs):	46000
Description 1:	T880 3 AXLE DUMP	G.C.W. (lbs):	86040
Description 2:			
	Application	Road Conditions:	
Intended Serv.:	Local pickup & delivery: Vehicles which	Class A (Highway)	90
Commodity:	Gravel/crushed rock/sand	Class B (Hwy/Mtn)	8
		Class C (Off-Hwy)	2
		Class D (Off-Road)	0
	Body	Maximum Grade:	6
Type:	End dump	Wheelbase (in):	192
Length (ft):	18	Overhang (in):	61
Height (ft):	13.5	Fr Axle to BOC (in):	74
Max Laden Weight (lbs):	4000		
		Cab to Axle (in):	118
		Cab to EOF (in):	179
	Trailer	Overall Comb. Length (in):	301.5
No. of Trailer Axles:	0		
Type:			
Length (ft):	0	Special Req.	
Height (ft):	0	U.S. Domestic registry, 50-state.	
Kingpin Inset (in):	0		
Corner Radius (in):	0		
	Restrictions		
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.



Sales Code	Std/Opt	Description	Weight
Model			
0000810	S	T880 Series Conventional	15,549
0070060	S	T880	0
0080055	O	CARB Idle Emissions Reduction - Cummins	0
0090000	S	Non-Sleeper w/rear axle capacity less than 59K.	0
0098437	O	State of Registry: Oregon	0
Engine & Equipment			
0130307	O	X15 500V 500@2000 1850@950 2021 with Intebrake, Productivity Series N09420 C333 0.....Reserve Speed Limit Offset (N09380 C334 0.....Maximum Cycle Distance (C334 N09360 C400 252...Reserve Speed Function Reset N09200 C399 120...Standard Maximum Speed Limit N09400 C401 10.....Maximum Active Distance (C40 N09220 C402 0.....Expiration Distance (C402) N09540 C395 0.....Expiration Distance (C395) N09260 C121 64.....Maximum Accelerator Pedal Ve N09440 C234 NO....Engine Protection Shutdown (N09460 C231 NO....Gear Down Protection (C231) N09580 C133 5.....Timer Setting (C133) N09680 C233 NO....Idle Shutdown Manual Overrul N09480 C132 1400..Max PTO Speed (C132) N09300 C128 64.....Maximum Cruise Speed (C128) N09500 C239 NO....Cruise Control Auto Resume (N09520 C238 NO....Auto Engine Brake In Cruise N09240 C209 120...Hard Maximum Speed Limit (C2 N09780 C190 80....High Ambient Temperature Thr N09740 C188 40....Low Ambient Temperature Thre N09760 C189 60....Intermediate Ambient Tempera N09720 C382 YES...Enable Hot Ambient Automatic N09600 C396 YES...Enable Impending Shutdown Wa N09620 C397 60....Timer For Impending Shutdown N09640 C206 35....Engine Load Threshold (C206) N09560 C225 YES...Enable Idle Shutdown Park Br	465
1000046	O	EPA Emissions Warranty Engine	0
1000151	S	PremierSpec	0
1000244	O	Gearing Analysis: Balance power/economy blend results.	0
1000248	O	Customer's Typical Operating Spd: 55 MPH.	0
1000684	O	Effective VSL Setting NA	0

Price Level: January 1, 2022
 Deal T880 3 AXLE DUMP
 Printed On: 5/26/2023 9:59:27 AM

Date: May 26, 2023
 Quote Number: QUC-877048-R1P1W7



Sales Code	Std/Opt	Description	Weight
1000858	O	Engine Idle Shutdown Timer Disabled	0
1000859	O	Enable EIST Ambient Temp Override	0
1000891	O	Eff EIST NA Expiration Miles	0
1002080	O	Air compressor: Cummins 18.7 CFM, Naturally Aspirated for Cummins X15 engines	0
1051200	S	Air Cleaner: composite firewall mounted PACCAR or Cummins engines	0
1099080	O	Pre-cleaner mounted in the hood plenum	0
1105220	O	Fan Hub: Horton 2-Speed for X15	0
1123555	S	Cooling module: 1330 square inches. Includes aluminum radiator core, aluminum charge air cooler, translucent surge tank and washer bottle, silicone hoses, and extended life coolant.	0
1160208	O	Radiator bug screen mounted between hood & grille.	2
1247234	S	EXH: 2021 RH Under DPF/SCR with RH SOC Vertical tailpipe. Not 2.1m high roof sleepers	0
1290124	O	Tailpipe: 5 in. single 24 in. 45 degree curved.	-3
1321125	O	Fuel Filter: Davco 382 Fuel/Water Separator	8
1321220	O	Run Aid: Cummins TRV for Davco only *For Fuel Filter, X15 AND 2.1 m models	2
1321305	S	Start Aid: 12V Heat *For Fuel Filter	0
1504005	O	Immersion block heater 120V 1500W w/plug under door on C500, T660, T800 & W900.	2
1816260	O	Alternator: PACCAR 160 amp, brush type	0
1821210	S	Batteries: 3 PACCAR GP31 threaded post (700-730) 2100-2190 CCA dual purpose.	0
1836106	O	Mitsubishi 105P55 12V Starter with Cummins and PX PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded. Only for Cummins or PX engines.	0
1840005	O	Battery disconnect switches 2, mounted on battery box.	2
1840065	S	12V low voltage disconnect for starter battery protection.	0
1900996	O	Jump start terminals under hood.	12
1901017	S	Remote PTO/Throttle, 12-Pin, Engine Bay	0

Price Level: January 1, 2022

Deal: T860 3 AXLE DUMP

Printed On: 5/26/2023 9:59:27 AM

Date: May 26 2023

Quote Number: QUO-877048-R1P1W7



Sales Code	Std/Opt	Description	Weight
		Remote Control Provision	
Transmission & Clutch			
2016627	O	Transmission: Allison 4500RDS 6-speed, With PTO drive gear. No Retarder. 6th Generation controls. For vocational applications. Includes shift control, transmission oil temperature gauge, oil level sensor & heat exchanger. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions.	478
2408502	O	Driveline: 2 Meritor RPL25 SD; 1 Centerbearing	114
2410018	O	Torque converter included w/Allison Transmission.	0
2410151	O	Pushbutton control center console mounted. Class 8 with Allison Transmission.	0
2410204	O	Allison Fuel Sense: Delete	0
2410310	O	Allison Neutral at Stop	0
2429358	O	Rear transmission support springs for transmission PTO applications are required to ensure that engine flywheel housings are not overloaded when transmission PTO's are installed.	0
Front Axle & Equipment			
2513030	O	Meritor MFS14 Plus 14.6K 3.74in. drop wide track.	-141
2607001	O	Front Brakes: 14.6K Bendix air disc brakes lube free.	0
2690025	O	Splined rotor for front air disc brakes for use with iron hubs.	0
2690028	O	Integral Knuckle for Air Disc Brake, for use on Meritor MFS PLUS Steer Axle.	0
2702500	O	Front Hub: iron hub pilot 14,600 lbs. 11-1/4 in. bolt circle. For use w/ air disc brakes. Consider wheelguards (5850002) w/ aluminum wheels.	48
2741970	S	ConMet PreSet Plus Hub package; front axle.	0
2750001	S	Hubcap: front vented.	0
2769000	S	Slack Adjusters included w/ front axle or brake. Also use w/ disc brakes.	0
2864116	O	Front Springs: Taperleaf 16K w/shock absorbers w/ maintenance-free elastomer spring pin bushings. Two leaf. Standard with rubber pins. Not available on W900L.	-85
2893881	O	Single power steering gear: 16K TRW TAS85 W900B/W990 available, but not available W900S, W900L or T3.	30
2899336	S	Power Steering Cooler:Radiator Mounted Air-to-Oil	0
2900616	O	Threaded Bushings for taperleaf spring	0

Price Level: January 1, 2022

Deal: T8803 AXLE DUMP

Printed On: 5/26/2023 9:59:27 AM

Date: May 26, 2023

Quote Number: OUC 877048-R1P1W7



Sales Code	Std/ Opt	Description	Weight
		16K, 18/20K, 22K, 40K replacing rubber.	
2900916	O	Front Disc Brake Pad/Rotor Dust Shields Air Disc Brakes Only.	0
Rear Axle & Equipment			
3142171	O	Dual Meritor RT46-164PEH rear axle rated at 46K w/ heavy wall housing. Tandem rear axles.	107
3200538	O	Rear Axle Ratio - 5.38.	0
3306001	O	Dual rear Bendix air disc brakes for dual rear axles to 46K capacity.	40
3392604	O	Splined rotor for dual rear air disc brake for use with aluminum hubs.	-208
3407050	S	Dual Rear Hubs: Aluminum hub pilot 46K 11-1/4 in. bolt circle.	0
3441972	S	ConMet PreSet Plus Hub package; dual rear axle.	0
3465900	O	Rear slack adjusters included w/ axle or air disc brakes.	0
3485002	O	Spring brakes included w/ dual rear air disc brakes.	0
3495226	O	Bendix 4S/4M anti-lock brake system.	0
3500058	S	Interaxle Driveline: 1 Meritor RPL20 Replacing I/A *Use W/ RPL(SD) 25 Main D/L	0
3511420	O	Driver Controlled Differential Lock (Crosslock) for Meritor Axles 40K to 52K forward rear & rear rear axle. Under Speed Interlock is standard on T680.	39
3573111	O	Separate switch for dual axles: differential lock or crosslock.	0
3749204	O	Rear suspension: Tandem Chalmers 854-46-H-HS 46K. 54 in. axle spacing. High center of gravity application. Unladen Height: 12.5 in. Laden Height: 10.9 in.	226
3830145	O	Delete standard heavy-duty air springs for rear suspension.	-28
3832026	O	Chalmers shock absorbers. 52K and under suspension.	35
Tires & Wheels			
4010006	O	Front Tires: Michelin X Works Z 315/80R22.5 20PR	-54
4210151	O	Rear Tires: Michelin X Works D 11R24.5 16PR	320
4900008	O	Rear Tire Quantity: 8	0
5045280	O	Front Wheel: Alcoa 89U64 22.5X9 AL Ultra One High Polish Wheel.	-24
5245265	O	Rear Wheel: Alcoa 98565 24.5x8.25 aluminum,	-48

Price Level: January 1, 2022
 Deal T880 3 AXLE DUMP
 Printed On: 5/26/2023 9:59:27 AM

Date: May 26, 2023
 Quote Number: CUJO-877048-R1P1W7



Sales Code	Std/Opt	Description	Weight
		with Lvl One [TM] High Polish finish, hub-pilot mount, 8000lb. maximum rating. Severe service. Code is priced per pair of wheels. Air disc brake compatible.	
5900008	O	Rear Wheel/Rim Quantity: 8	0
Frame & Equipment			
6056400	O	Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel 285in. to 336 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	257
6302461	O	Bumper: Tapered chrome steel channel. Requires a bumper setting code.	63
6319485	S	48.5 in. Bumper setting. Requires a bumper code.	0
6324025	O	Front tow hook: Center mounted, cast. Requires iron front drive brackets.	28
6390048	O	Rectangular bumper cutouts for customer-installed fog lights.	0
6390312	O	Brackets: Iron front spring drive. Included with front spring capacity of 16,000 lbs or greater; code not required.	47
6391201	O	Custom Frame Layout: one chassis CFL A/D: MOUNT AIR DRYER INSIDE FRAME BOC	0
6400636	O	Battery box cantilever aluminum BOC with fiberglass cover.	8
6409902	O	Battery box location: RH Side.	15
6451090	S	T470,C5, T6, T8 non-polished DPF/SCR or CNG cover diamond plate w/ step. For use w/ 2010 or later exhaust systems. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components. End plates will be painted standard black frame color.	0
6490440	O	Heavy-duty BOC crossmember assembly.	23
6679858	O	Final end-of-frame cut-off dimension will be modified to 51 in. to 55 in.	0
6721102	S	Rear mudflap arms: Betts B-25 standard-duty, straight. Includes B1732 mounting brackets as standard.	0
6722000	S	Rear mudflap shields: White plastic antisall w/ Kenworth logo.	0
6742009	S	Square end-of-frame w/o crossmember; non-towing.	0
Fuel Tanks & Equip			
7210100	O	Fuel Tank: 100 US gallon 24.5in. aluminum under	0

Price Level: January 1, 2022

Deal: T680 3 AXLE DUMP

Printed On: 5/26/2023 9:59:27 AM

Date: May 26, 2023

Quote Number: OUC-877048-R1P1W7



Sales Code	Std/Opt	Description	Weight
		replace. Class 8 fuel tanks w/o locking caps include an anti-siphon device on the filler neck.	
7722153	S	Small round DEF tank, 14 gallons. The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	0
7831006	O	6 in. wide lower fuel tank step, for one 22 in. or 24.5 in. or T300 rectangular tank RH.	2
7889203	S	DEF to fuel fill ratio 2:1 or greater.	0
7889245	S	Anti-siphon device in fuel tank filler neck. For any number of fuel tanks.	0
7889604	S	DEF tank location is LH.	0
7920100	O	Location: 100 gal fuel tank LH under cab	0
Cab & Equipment			
8025301	S	Cab: Stamped aluminum cab with panoramic curved glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0
8090604	O	Hood: T880 Standard Length With Mechanically Fastened Fenders. 122.6 inch BBC.	15
8098212	O	Bright Engine Air Intake Chrome Trimmed Engine Air Intake on Both Sides of Hood	0
8108003	O	Ember Filter For Cabin Air. Used to keep embers out of the HVAC filter element. Cannot be used with code 8108002.	2
8108011	S	Cab HVAC - Day Cab and 40in Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0
8190138	O	Shutoff Valves to Isolate Primary Heater Remote mounted on frame under cab.	0
8201047	S	Kenworth Smartwheel: 18 in. Non-Leather With Integrated Radio and Cruise Controls.	0
8201051	O	Column Mtd Retarder Control, RH Side Use with Manual & Allison Transmissions Only.	0
8201200	S	Adjustable telescoping tilt steering column.	0
8203060	O	5 sets of keys. Replaces standard 2 sets of keys.	0
8203196	O	Dash Mounted Compact Trailer Brake Valve.	0

Price Level: January 1, 2022

Deal: T880 3 AXLE DUMP

Printed On: 5/26/2023 9:59:27 AM

Date: May 26, 2023

Quote Number: OUC-877048-R1P1W7



Sales Code	Std/Opt	Description	Weight
		Self Returning.	
8205012	O	Off-highway dash switch: For ABS system. Includes indicator light.	0
8208495	O	Two spare switches: Wired to power.	0
8220106	O	Gauge: Dash mounted air filter restriction gauge.	0
8221160	O	Gauge: Engine Oil Temperature Gauge With Integral warning light. The NavPlus HD unit includes a virtual engine oil temperature gauge.	0
8222404	S	Gauge: DD Virtual Gauge - Oil Temp Engine	0
8222409	S	Gauge: DD Virtual Gauge - Air Filter Restriction	0
8222413	S	Gauge: DD Virtual Gauge - Manifold Pressure Boost	0
8222414	S	Gauge: DD Virtual Gauge - Engine Percent Torque	0
8222712	O	Gauge: Fuel filter restriction gauge.	0
8225658	O	Gauge: Axle oil temperature, dual-drive axle. (2 gauges) w/integral warning light.	0
8226667	O	Gauge: Oil Temperature Gauge Transmission. The NavPlus HD unit includes a virtual transmission oil temperature gauge.	0
8282027	S	Main Instrument Package: 15" Digital Display. Includes Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, OAT and Voltmeter, and Air Application.	0
8282108	O	Modular Dash Options: RH Dash storage unit with two shelves. Reduces total gauge count; HD by 6 and MD by 4.	0
8282120	O	USB Charging Port - Dash Panel *Requires 15" Digital Display 8282027/8282028	0
8300008	S	Interior color: Slate Gray	0
8330102	S	Interior package: Vantage daycab Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0
8390634	S	Rubber floormat	0
8410200	O	Driver Seat: GT701 HB with Vinyl material.	0

Price Level: January 1, 2022

Deal: T8803 AXLE DUMP

Printed On: 5/26/2023 9:59:27 AM

Date: May 26, 2023

Quote Number: QUC-877048-R1P1W7



Sales Code	Std/Opt	Description	Weight
		The GT701 is standard with a single air bag, scissor linkage seat suspension. It includes a single chamber lumbar support, 10in Fore/Aft adjustment, 7in Up/Down adjustment, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	
8460200	O	Rider Seat: GT701 HB with Vinyl material. The GT701 is standard with a single air bag, scissor linkage seat suspension. It includes a single chamber lumbar support, 10in Fore/Aft adjustment, 7in Up/Down adjustment, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. RD seat standard w/ LH armrest.	34
8490181	S	Seat Color: Black	0
8497005	O	Air line fitting: At driver seat. Customer-installed air chuck.	4
8601432	O	Kenworth Radio DEA710 AM/FM/WB/USB, Bluetooth	0
8601881	O	CB Radio: Cobra 29. W/header mounted quick release. Includes transceiver & separate speaker remote-mounted in headliner & dual CB antennas. Includes sound tracker & illuminated panel.	11
8698982	O	Mid Level Audio System - Daycab: High Performance Door and B-Pillar Speakers.	4
8700196	O	Turn Signal: Self-Cancelling	0
8700283	S	LH and RH Trip Ledge Rain Deflectors	0
8700663	S	Kenworth TruckTech+ The Kenworth Remote Diagnostics system provides the Worlds Best reporting of engine and aftertreatment fault codes, as well as enhanced support for the truck owner through rapid communication of fault severity and recommended actions. This option is Standard on all Heavy Duty Kenworths with a PACCAR MX engine, Cummins X15 engine, PX engine or Natural Gas engine. Optional on Medium Duty Kenworths.	0
8800402	S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0
8832113	S	Kenworth Daylite Door with standard LH/RH electric door locks and LH/RH electric window controls.	0
8841618	O	Dual rectangular air horn 23 in. LH & RH top of roof. Includes air horn covers.	4
8850139	S	Look-Down, Pass. Door, Black 11x6	0
8865002	S	Aero Mirror: Dual Kenworth Aerodynamic Motorized heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on driver side door pad.	0
8871446	S	Rear cab stationary window 19in x 36in	0

Price Level: January 1, 2022
 Deal T880 3 AXLE DUMP
 Printed On: 5/26/2023 9:59:27 AM

Date: May 26, 2023
 Quote Number: OUC-877048 R1P1W7



Sales Code	Std/Opt	Description	Weight
8890038	O	3.5in x 11.5in Plastic Records Holder:Mounted On Rear Cab Panel. Not available With Sleeper Or 2 Person Bench Seat.	0
8890101	S	One-piece bonded-in windshield with curved glass. Standard.	0
8890135	S	Exterior stainless steel sunvisor.	19
8890300	O	Fender close-out: Below headlamp, behind bumper. *NOT available with 3-piece bumper.	0
8890349	S	Wheelwell Fender Extension: 2.5 Inches	0
8890876	S	Kenworth Cab/Sleeper Air Suspension.	0
8891013	O	Extreme Temperature Insulation: Daycab Additional cab side wall insulation with improved material properties over standard insulation package.	0
Lights & Instruments			
9010553	S	Headlamps: SAE Dual Halogen Complex Reflector	0
9022137	S	Marker Lights: Five, rectangular, LED	0
9030016	S	Turn Signal Lights: Flush mounted LED. Mounted at top of fender wheel arc.	0
9030052	S	LED Stop,Turn,Tail: With Two LED Backup Lights and With An LED License Plate.	0
9049825	O	Customer-installed road/fog lights switch & wiring.	0
9058071	O	Switch, Wiring, and Indicator Light for Customer Installed Floodlights. 1st Set. Pigtail Routed Through Pass Thru Grommet. 10ft Jumper Harness Shipped Loose.	1
9059921	O	Floodlight Location: Located Low - First Set . This Code To Be Used With Flush-Mount (9052011) or C/I (9058071) Codes Only.	0
9080141	O	Dual Low-Profile LED Amber Strobe Beacon centered over door.	7
9090039	S	Marker Lights: Interrupter Switch. Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0
9090049	S	Omit Brake Light with Engine Brake. Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0
9090849	O	Polyswitches replacing fuses. Switch will automatically reset after removal of excess load.	0
Air Equipment			
9101219	O	Air Dryer: Bendix AD-HF Extended Purge Heated With Puraguard	0
9108001	S	Moisture ejection valve w/ pull cable drain.	0

Price Level: January 1, 2023

Deal: 18803 AXLE DUMP

Printed On: 5/26/2023 9:59:27 AM

Date: May 26, 2023

Quote Number: QUC-877048-R11*1W7



Sales Code	Std/Opt	Description	Weight
9110020	O	Full Truck Kit Gladhands mounted at end-of-frame. Seven-way female receptacle mounted at end-of-frame in taillamp bracket. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve, tractor protection valve, and spring brake inversion/relay valves are standard.	15
9140020	S	Nylon air tubing in frame & cab, excluding hoses subject to excessive heat or flexing.	0
9140254	O	Locate air dryer inside RH rail BOC. This code requires the use of a custom frame layout code.	0
9140328	O	Trailer ABS electric supply through SAE J560 7-pin connector per TMC RP137).	0
Extended Warranty			
9200021	S	Base Warranty - Standard Service Heavy Duty 12 months / 100,000 miles / 160,000 km.	0
9212611	O	24 Month TruckTech+ Subscription for Cummins Engines	0
9220001	O	Base Warranty: Emissions 5YR/100K MI - EPA Engine	0
Miscellaneous			
9409852	O	GHG Secondary Manufacturer: Does Not Apply	0
9490003	O	Additional lead time required for off highway & /or specialty component truck.	0
9491659	S	VMUX Architecture	0
Promotions			
Paint			
9700000	O	Paint color number(s). N9702 A - L0006 WHITE N9720 FRAME N0001 BLACK	0
9943004	O	Bumper Unpainted	0
9943048	O	Day Cab Bulk Paint	0
9943050	O	Day Cab Standard Paint	0
9944820	S	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0
9965510	S	Base coat/clear coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0

Price Level: January 1, 2022

Deal: T8803 AXLE QUIMP

Printed On: 5/26/2023 9:59:27 AM

Date: May 26 2023

Quote Number: QUC-877048-RAP1W7



<i>Sales Code</i>	<i>Std/ Opt</i>	<i>Description</i>	<i>Weight</i>
-------------------	-----------------	--------------------	---------------

Order Comments

Price Level: January 1, 2022
Deal: T880 3 AXLE DUMP
Printed On: 5/26/2023 9:59:27 AM

Date: May 26 2023
Quote Number: QUO-877048-R1P1W7



Total Weight

17,447

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER

While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information




Shipping Destinations

Intermediate Destination:


Final Destinations	Quantity
--------------------	----------

HORIZONTAL DIMENSIONS

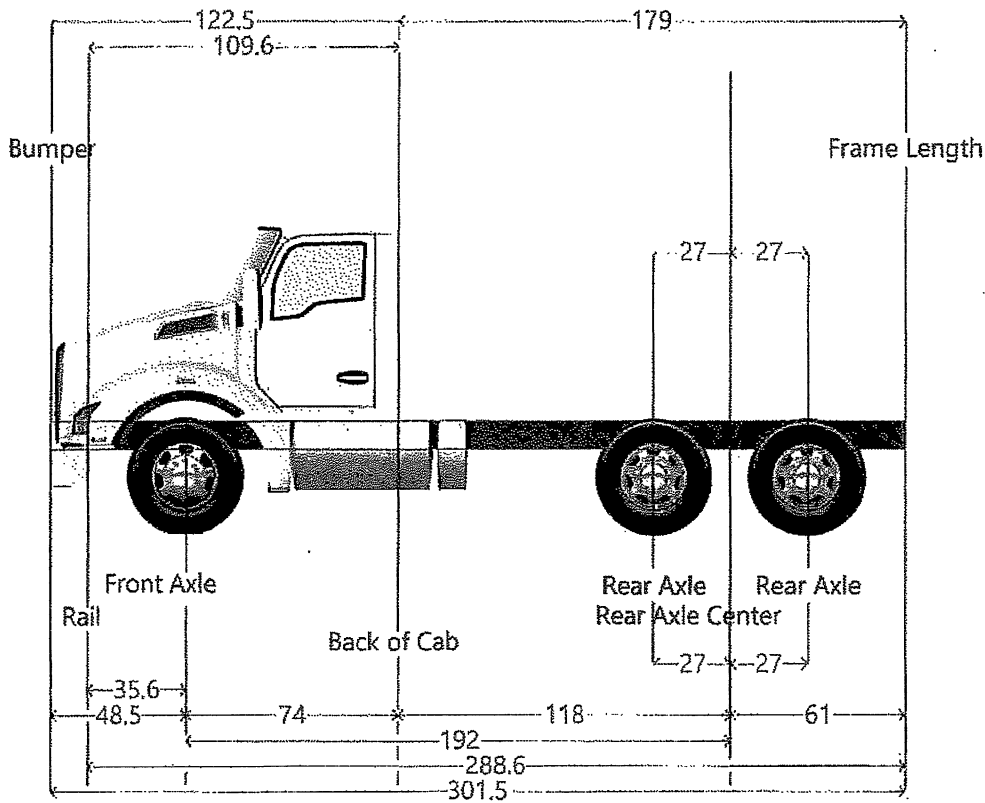

Dimension	Measurement	Start	End
Axle Spacing	54	165	219
Bumper to Back of Cab	122.5	-48.5	74
Bumper to Front Axle	48.5	-48.5	0
Bumper to Front Frame	12.9	-48.5	-35.6
Cab to End of Frame	179.0	74	253
Cab to Rear Axle	118.0	74	192
Effective Bumper to Back Of Cab	122.5	-48.5	74
Frame Length	288.6	-35.6	253
Front Axle to Back of Cab	74.0	0	74
Front of Frame to Axle	35.6	-35.6	0
Load Space	179.0	74	253
Overall Length	301.5	-48.5	253
Overhang	61.0	192	253
Pusher Offset #1	27.0	165	192
Pusher Offset #2	27.0	165	192
Pusher Offset #3	27.0	165	192
Tag Offset	27.0	192	219
Wheelbase	192	0	192

FRAME LAYOUT

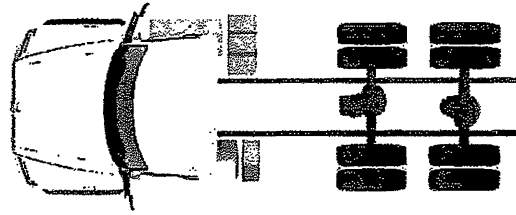

Note: Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured. Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

Selected Options (Wheelbase: 192)

Sales Code	Description	Length	Side
7210100	Fuel Tank: 100 US gallon 24.5in. aluminum under	50	Left
7722153	Small round DEF tank, 14 gallons.	10.2	Left
6400636	Battery box cantilever aluminum BOC with	17.3	Right



COLUMBIA
Body Manufacturing

P. O. Box 999 • 10037 SE Mather Road • Clackamas, Oregon 97015
(503) 656-3775 • 1-800-233-7119 • FAX (503) 656-5064

Customer: City Of Canby / Pape' Kenworth
Address: 1470 Northwest Territorial Road
City State Zip: Canby Oregon 97013
Attention: Chris/Blake Phone:541-868-7098

Date: 5/25/2023
Estimate #: 2K23056R1
Salesman: Kirk Snead
Email: WrightC@canbyor
egon.gov

Estimate 10-12-yard Dump Body with pup Package with (118 CA)

- o Approximant dimensions of dump body: 14' long, 84" inside, 37" tall, and 96" wide. 118" CT required
- o Water level of body will be approximately 11 yard and 12 yards with sideboards.

Dump body floor and under structure

- 1) The dump body floor shall be formed from one piece of 3/16-inch Hardox 450 floor
- 2) 10"x 4"x .188" A500 grade B rectangular tube long members with vulcanized rubber truck frame buffer pad
- 3) Rear cross member shall be formed from 3/16-inch A572-50 high tensile steel and interlock with rear corner posts
- 4) Front cross member shall be 4-inch by 5.4 lb structural channel and full width of dump body.
- 5) Floor cross supports between the front and rear cross-members are unacceptable.

Body sidewalls corner posts and dash panel

- 1) Sides shall be elliptical design 3/16 Hardox 450 with 20" radius corners
- 2) Rear corner posts shall be 3/16-inch A572-50 high tensile steel.
- 3) Rear corner posts shall inner lock with sidewalls and rear cross member.
- 4) Rear corner posts shall each have two stop tail turn lights with rear and side marker lights.
- 5) Dash panel shall be 3/16 Hardox 450.
- 6) Weld seams in inner wall panel are unacceptable.

Tailgate

- 1) The panel shall be 3/16 Hardox 450
- 2) The tailgate shall be framed with 3"x 3" x .120" A500 grade B tubing and three center braces.
- 3) The tailgate shall have an angle welded on the top tube to prevent material build up.
- 4) The latch pins shall be 1-inch cold drawn AISI 1018 minimum.
- 5) The tailgate shall have two double key plates and 3/8 proof coil spreader chains with storage hooks.
- 6) The hinges arms shall be plasma cut 1-inch A514 (T1) steel plate.
- 7) The hinge blocks shall be plasma cut 1/2-inch A514 (T1) steel plate.
- 8) The hinge pins shall be 1-inch round cold drawn AISI 1018.
- 9) The hinge arms shall rest on top of the hinge blocks when the tailgate is latched
- 10) High lift Tailgate (hydraulic)
- 11) 3 roll type batch gates

Tailgate latch

- 1) The latch hooks shall be plasma cut 1/2-inch A572-50 high tensile steel.
- 2) The tailgate trip rod shall be 1-inch cold drawn AISI 1018.
- 3) The trip rod will be supported by four 3/4-inch grease type bearing blocks
- 4) The trip rod shall have an over center lock with adjustable linkage assemblies for both latch hooks.

- 5) The air trip cylinder shall be air open spring lock.

Cab guard

- 1) The cab guard shall be fabricated from 10 ga A607-50 high tensile steel with 3/16 support arms
- 2) The cab guard will provide adequate cab coverage no wider than the truck cab.
- 3) Center mounted beacon (Star Beam 9016LED-AA-C)

Hoist cylinder and mounting

- 1) The hoist cylinder shall be single A-Frame mount with a 56,000-pound lift capacity @ 2,250 PSI.
- 2) The hoist cylinder shall have adjustable packing.
- 3) The hoist mount channel assembly shall be over frame type
- 4) The channel shall be formed 1/2-inch A572-50 high tensile steel ten inches wide with 3-1/2-inch legs 24 inches long
- 5) The lower hoist bearing blocks shall be 3/4-inch A36 with and 2-inch AISI 1018 lower pin.

Truck chassis hitch shall be equipped to tow a Pup or 50,000 lb trailer

- 1) The trapezoidal hitch plates shall be formed 1/2-inch A572-50 minimum.
- 2) The center bulkhead plate will be 3/4-inch A-572-50 minimum.
- 3) The air hitch shall be six-bolt mount with 90,000 horizontal pull capacity
- 4) Two safety D-rings shall be 1-inch and mounted under hitch.
- 5) The hitch will cover with and rubber flap to shed rock and dirt.
- 6) Glad-hands on rubber hoses, electrical connections shall be routed to hitch area and recessed to prevent damage.
- 7) The body hinges shall be greaseless design.
- 8) The hinge pins shall be 1-7/8-inch.
- 9) The hinge bushing assemblies shall be full rap design.
- 10) The hinge bearing blocks shall be 1-inch A572-50 high tensile steel.
- 11) Two oval stop, tail, turn lights and one rubber mounted work lights on the back up circuit will be mounted in a removable cover plate below the hinge angle.
- 12) County spec chip bar

A-Frame hoist mount

- 1) Dump body shall have A-Frame lift
- 2)

Hydraulics

- 1) Hydraulics will allow to operation truck hoist, high lift gate and pup hoist
- 2) The PTO shall be Hot Shift CS24 mounted with extended shaft mount on an Allison 4500 series automatic transmission.
- 3) The hydraulic pump shall be direct mount, SAE B, 7/8 13 spline.
- 4) The hydraulic pump shall be Parker P20 4.0 CI with O-Ring ports.
- 5) The hydraulic system shall produce a flow of 21 GPM @ 1,000 RPM minimum
- 6) The hydraulic control valve shall be a Parker VA35 six- spool sectional valve capable of flows up 75-gpm with O-Ring ports.
- 7) The valve section that controls the truck hoist shall have an adjustable hoist over run protection
- 8) The hydraulic tank shall be a 35-gallon steel with strainer, sight gauge, and frame mounted.
- 9) The hydraulic system shall include a high-pressure return line filter (25 micron).

- 10) The hydraulic system will operate @ 2,250 PSI.
- 11) The hydraulic pressure hoses shall be # 16 rated @ 3,000-PSI minimum.
- 12) Hydraulic pressure fittings shall be JIC 37 degree and O-ring boss.
- 13) Plumb hydraulics for chassis ,lift cylinder, highlift tailgate and pup

Body lights and reflectors

- 1) LED Truck-Lite 60 series oval stop, tail, and turn shall be grommet mounted
- 2) Round marker lights and reflectors shall be installed where necessary
- 3) Sealed harness and junction box wire system shall be installed
- 4) Center warning beacon and swivel bracket mounted on the cab guard and shall be visible in all positions

Cab controls

- 1) The hoist control shall be Del air lever mounted in the cab to the right side of the driver.
- 2) The control hoist lever shall have a neutral lock out
- 3) The control tower shall include switches for truck tailgate and PTO.

Safety prop, flaps, spray guards, tarp, and miscellaneous

- 1) Body Safety Prop on the left of chassis
- 2) Mud flaps shall be black ahead and behind drive tires.
- 3) Shovel holder
- 4) Axe holder
- 5) The dump body shall have Douglas fir sideboards 4X8
- 6) High mount electric tarp system with asphalt tarp

Electrical

- 1) The body installer will add a sealed production type up fit harness for added functions.
- 2) Isolate all electrical circuits installed by body builder from truck chassis with a continual duty solenoid and six-section fuse block.
- 3) A sealed body wire harness lighting system shall be installed
- 4) Wiring shall be stranded copper.
- 5) Wire insulation shall be cross-linked polyethylene.
- 6) Wire shall be sized so that the voltage drop for the wire run is less than 5 percent, wiring shall be routed to minimize exposure to tire throw-off
- 7) Wires shall not be routed closer than 6 inches from heat sources
- 8) Wires shall not come in contact with moving parts
- 9) Wires shall be protected from sharp edges
- 10) Lighting and reflectors shall comply with FMVSS 108.
- 11) Seven-wire trailer connector to be wired as per SAE J560B specification shall be run to the rear of the chassis plus pup wiring
- 12) All electrical connections that are not in a junction box will be weather-pack connectors.

Air system installation

- 1) All air hoses shall be DOT approved.
- 2) The bend radius of airlines shall be not less than the manufacturer's recommended minimum.
- 3) Airlines shall not come in contact with moving parts or be routed through holes or across sharp edges without protection from being chafed or cut.
- 4) Airlines shall be adequately clamped or tied to supporting structures
- 5) Airlines routing shall be so that low points are minimized
- 6) Hoses shall be of sufficient length to prevent stretching, distortion, or disconnecting.

Welding

- 1) Excessive distortion of assembled parts in not acceptable
- 2) The dump body and other fabricated components shall have good welds. A good weld will have proper penetration and be relatively uniform in appearance.
- 3) All welds shall conform to or exceed American Welding Society Standards and shall provide a metal-to-metal bond, with adequate penetration using proper flux and or welding materials
- 4) Down hand welds are not recommended for ten gauge or thicker material, if down hand welds are used, they shall have proper penetration
- 5) Some characteristics of an unacceptable weld are the following: cracks, undercut, overlap, excessive splatter, slag entrapment, inadequate penetration, excessive distortion, blowholes, inclusions, excessive porosity, concave or convex

Paint

- 1) All metal surfaces to be free of contaminates they may cause loss of adhesion (sand blast prep).
- 2) The first primer undercoat shall be a metal-etching primer.
- 3) The second primer "high solids" undercoat shall be epoxy base, lead and chromate free.
- 4) Film thickness shall be 1.0 mils or greater dry using a low VOC high solids epoxy primer.
- 5) Topcoat shall be Cloud Sliver Axalta N0217EZ cab using lead free paint.
- 6) Topcoat shall be Low VOC high solids acrylic urethane with a film thickness of 2 to 3 mils.
- 7) Substrates must be between 50 and 110 degrees in a controlled environment during the primer and paint application.
- 8) Compressed air supply must not exceed 20% humidity during the spray process.

Dump body manuals

- 1) One owner's manual shall be supplied with each dump body
- 2) The manual shall include information about the safe operation of the dump body.
- 3) The manual shall also include parts information and electrical and hydraulic schematics of the equipment installed on the chassis.

Base price -----\$72,396.00

Option:

1, Axalta F2511 blue paint upgrade-----\$ 1000.00
2, camera system, with two blinker and one tailgate camera-----\$ 2500.00

******TOTAL PRICE NO FET, Cat or state TAX FOB CLACKAMAS, OREGON**** \$ 75,896.00**

Due to more frequent and unexpected increases in materials costs and volatility throughout the supply chain beyond the control of Columbia Body Manufacturing Co., and depending on the actual date of manufacturing based solely on the date of Customer acceptance of this quote when compared to actual date of delivery of chassis to Columbia Body Manufacturing Co., a materials costs surcharge may apply. Under no circumstances will a materials costs surcharge apply if delivery of chassis to Columbia Body Manufacturing Co. is within 90 days of date of Customer acceptance of this quote.

The purpose of the materials costs surcharge would be to offset any unexpected and significant increases in costs of materials that are included in this quote. The materials costs surcharge would be additional charges that would be added to the base price and/or separately stated price options.

Customer will be notified of any applicable materials costs surcharge in writing, prior to the start of the manufacturing process.


If Customer cancels quote after signing acceptance or issuing a related purchase order, but prior to the beginning of the manufacturing process, a 10% restocking fee will be applied to materials costs included in this quote.

Any custom materials or parts specific to this quote will require 100% prepayment at time of Customer quote acceptance, and will subsequently be considered owned by Customer if customer cancels quote.

****** Quote good for 30 days******

Cut customer Acceptance Signature _____

Date _____

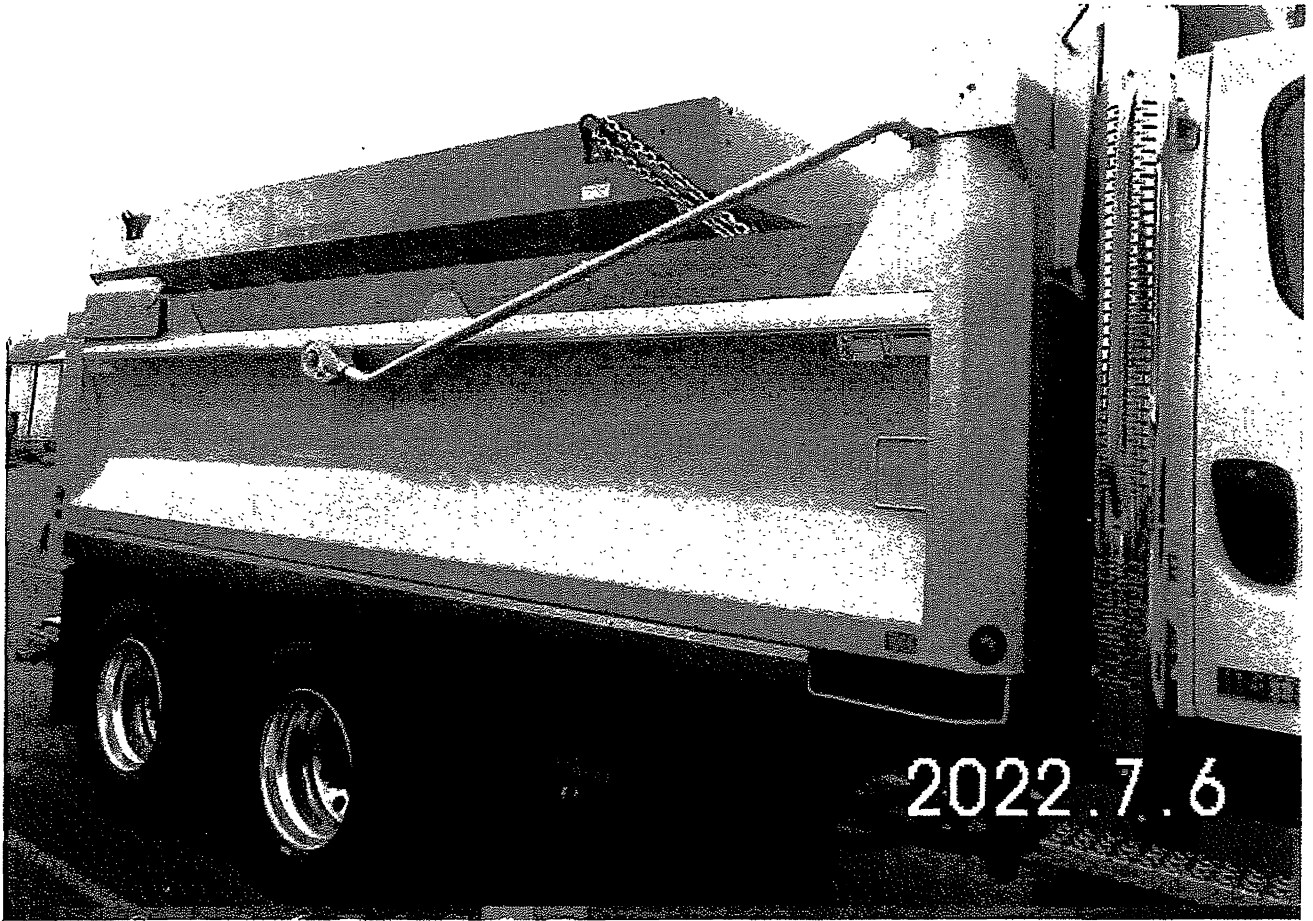


TRUCK BODY LAYOUT

CUSTOMER Canby/Pape

CHASSIS Kenworth

QUOTE # 2K23056

VIN # _____

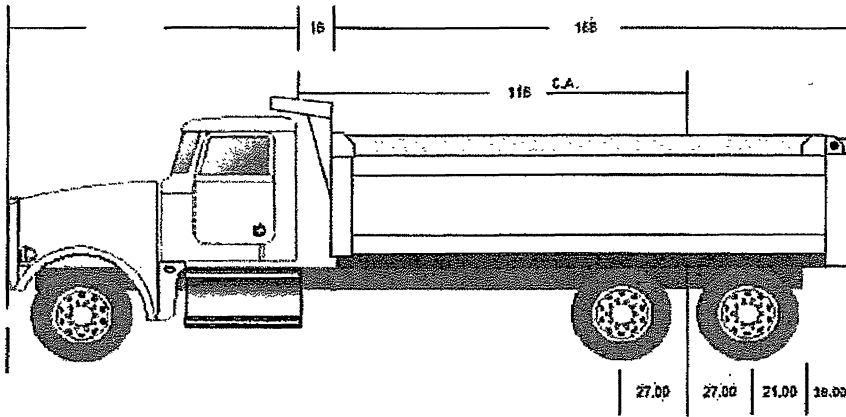

Inside width	84
Water level side height	37
Body length	168
Body set back	16
BOC to end of body	184
BOC to BOT	166
OVERHANG	18
BOC TO BOT	166

FRONT OF BODY TO HOIST PIN 16 Use -7 for "A frame" hoist
 BACK OF TIRE TO HINGE PIN 1.75

REQUIRED CYL. STROKE **112.6**

Cubic yardage - dbl. wall	11.0
Cubic yardage - e body	10.7
Truck dry weight	31000
CBM gear	6114.26
Truck GVWR	64000
Estimated payload	26885.74
TONS	13.44287

Request for Taxpayer Identification Number and Certification

Give Form to the requester. Do not send to the IRS.

Go to www.irs.gov/FormW9 for instructions and the latest information.

1 Name (as shown on your income tax return). Name is required on this line; do not leave this line blank.
THE PAPE' GROUP, INC.

2 Business name/disregarded entity name, if different from above
PAPE' TRUCKS, INC. dba Pape' Kenworth

3 Check the appropriate box for federal tax classification of the person whose name is entered on line 1. Check only one of the following seven boxes.

Individual/sole proprietor or single-member LLC

C Corporation

S Corporation

Partnership

Trust/estate

Limited liability company. Enter the tax classification (C=C corporation, S=S corporation, P=Partnership) ▶ _____

Notes: Check the appropriate box in the line above for the tax classification of the single-member owner. Do not check LLC if the LLC is classified as a single-member LLC that is disregarded from the owner unless the owner of the LLC is another LLC that is not disregarded from the owner for U.S. federal tax purposes. Otherwise, a single-member LLC that is disregarded from the owner should check the appropriate box for the tax classification of its owner.

Other (see instructions) ▶ _____

4 Exemptions (codes apply only to certain entities, not individuals; see instructions on page 3):

Exempt payee code (if any) **5**

Exemption from FATCA reporting code (if any) _____

(Applies to accounts maintained outside the U.S.)

5 Address (number, street, and apt. or suite no.) See instructions.
355 GOODPASTURE ISLAND RD

6 City, state, and ZIP code
EUGENE OR 97401 (See attached for branch locations)

7 List account number(s) here (optional)

Requester's name and address (optional)

Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on line 1 to avoid backup withholding. For individuals, this is generally your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the instructions for Part I, later. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN*, later.

Note: If the account is in more than one name, see the instructions for line 1. Also see *What Name and Number To Give the Requester* for guidelines on whose number to enter.

Social security number									
				-					
OR									
Employer identification number									
9	3	-	1	0	4	8	9	3	2

Part II Certification

Under penalties of perjury, I certify that:

- The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me); and
- I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding; and
- I am a U.S. citizen or other U.S. person (defined below); and
- The FATCA code(s) entered on this form (if any) indicating that I am exempt from FATCA reporting is correct.

Certification instructions. You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the certification, but you must provide your correct TIN. See the instructions for Part II, later.

Sign Here Signature of U.S. person ▶ *Same form* Date ▶ **1/3/2023**

General Instructions

Section references are to the Internal Revenue Code unless otherwise noted.

Future developments. For the latest information about developments related to Form W-9 and its instructions, such as legislation enacted after they were published, go to www.irs.gov/FormW9.

Purpose of Form

An individual or entity (Form W-9 requester) who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) which may be your social security number (SSN), individual taxpayer identification number (ITIN), adoption taxpayer identification number (ATIN), or employer identification number (EIN), to report on an information return the amount paid to you, or other amount reportable on an information return. Examples of information returns include, but are not limited to, the following.

- Form 1099-INT (interest earned or paid)
- Form 1099-DIV (dividends, including those from stocks or mutual funds)
- Form 1099-MISC (various types of income, prizes, awards, or gross proceeds)
- Form 1099-B (stock or mutual fund sales and certain other transactions by brokers)
- Form 1099-S (proceeds from real estate transactions)
- Form 1099-K (merchant card and third party network transactions)
- Form 1098 (home mortgage interest), 1098-E (student loan interest), 1098-T (tuition)
- Form 1099-C (canceled debt)
- Form 1099-A (acquisition or abandonment of secured property)

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN.

If you do not return Form W-9 to the requester with a TIN, you might be subject to backup withholding. See What is backup withholding, later.

AFFIDAVIT OF POSTING

STATE OF OREGON)
)
County of Clackamas) ss:
)
CITY OF CANBY)

I, Maya Benham, being first duly sworn, depose and say that I am the City Recorder for the City of Canby, Clackamas County, Oregon, a City duly incorporated under and by virtue of the laws of the State of Oregon.

That on the 7th day of June, 2023 the Council for said City of Canby held a Regular City Council Meeting, at which meeting Ordinance No. 1604 was read for the first time and passed by the vote of said Council and was then and there ordered posted in at least three (3) public and conspicuous places in said City for a period of five (5) days prior to the second reading and final vote on said Ordinance, as provided in Section 2 of Chapter 8 of the Charter of the City of Canby, and

Thereafter, on the 9th day of June, 2023, I personally posted said Ordinance in the following three (3) conspicuous places, all within the said City of Canby, to wit:

- 1. Canby Civic Building
- 2. Canby Post Office
- 3. City of Canby Web Page

That since said posting on the date aforesaid, the said Ordinance will remain posted in the said three (3) public and conspicuous places continuously for the period of more than five (5) days and until the very 21st day of June, 2023.

Maya Benham
Maya Benham, City Recorder

Subscribed and sworn to before me this 7 day of July, 2023.

Jessica Roberts
Notary Public for Oregon
My Commission Expires:

