




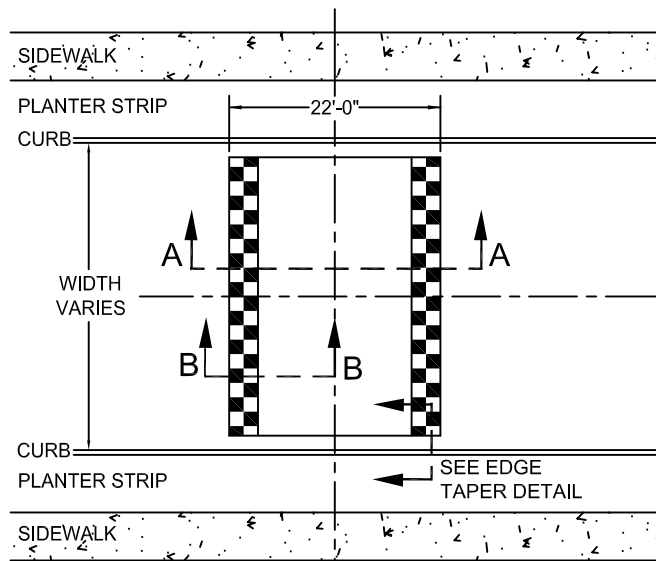


PLAN VIEW

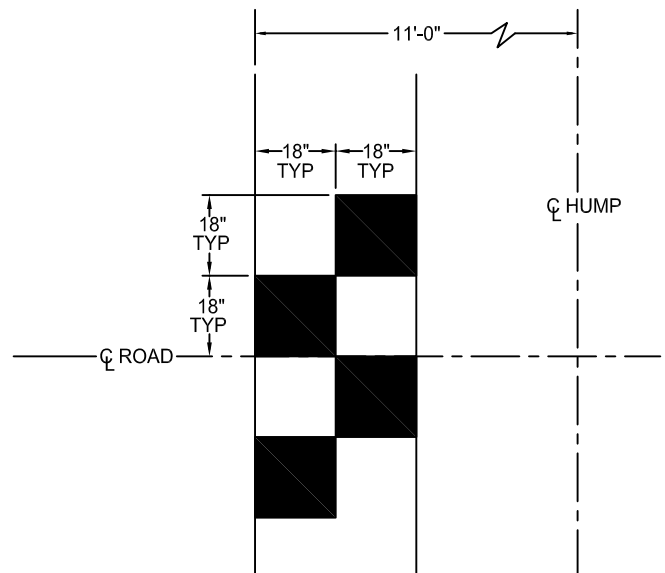


PAVEMENT MARKING DETAIL

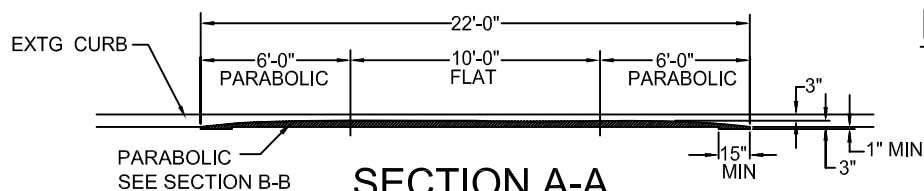

SECTION A-A

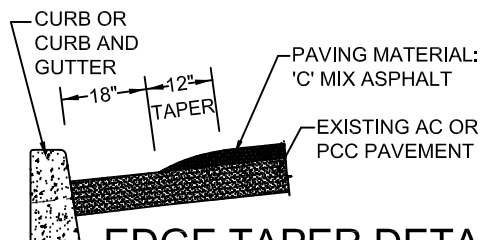

EDGE TAPER DETAIL

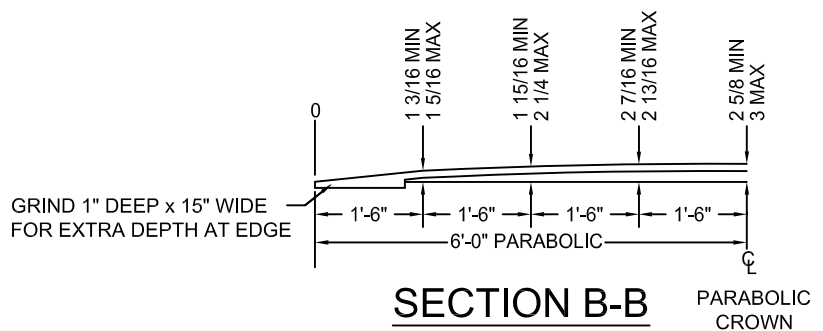

SECTION B-B

PARABOLIC CROWN

APPLICATION NOTES:

[Approved for use when the conditions below exist.]

1. Locations per approved plan.
2. Posted speed 25 mph.
3. Tangent sections or curves with 300 ft. radius or larger.
4. Grade less than 8%.
5. No more than 2 travel lanes.

CONSTRUCTION NOTES:

1. Grind for extra depth at edges as shown.
2. Apply bitumal tack coat over air-blown cleaned and swept asphalt concrete.
3. Asphalt shall be rolled for compaction per specifications.
4. Finish edges by applying tack coat and sand sweeping. Tack coat shall conform to ODOT Specifications, Type CSS-1, CSS-1H.



City Of Beaverton

**PUBLIC WORKS
DEPARTMENT**

**ASPHALTIC CONCRETE
SPEED TABLE**

TRAFFIC ENGINEER
Randall R. Wooley

DATE
6 - 10 - 04

DRAWN BY
CG - CPD

DRAWING NO.
246